


BROUGHT DISC HARROWS "X" SECTIONS  
SERIES

# EDX 750 EDX 780



EDX 780 21 12

MANUAL ADJUSTABLE  
SECTIONS

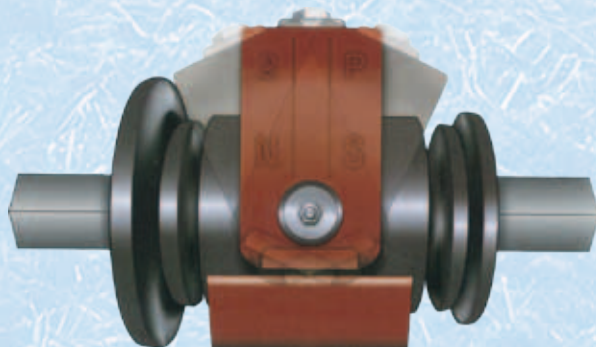

#### SWIVELLING SUPPORT system MA/AG

On the series EDX we use swivelling supports with 2 conical roller bearings (to absorb, in addition to the vertical load also the horizontal actions) with inferior interchangeable protection carter.

The ma/ag's supports are the fruit of a targeted and specific internal design, validated from over 35 years of experience and continuous improvements for granting an extremely reliable product in all conditions of use.

**ma/ag**  
MACHINE AGRICOLE

**STANDARD EQUIPEMENT**

		<b>EDX 750</b>	<b>EDX 780</b>
<b>FRAME</b>	Tubular steel	90x90x7	120x100x7
<b>SECTIONS</b>	Tubular steel, turning for reducing the floor space	100x50x7	140x70x7
<b>DISC AXLE</b>	Steel square	30 mm	40 mm
<b>SUPPORTS</b>	Two conical roller bearings, swivelling, with interchangeable crankcase system ma/ag		
<b>SOIL SCRAPER</b>	Individual adjustable plungers		
<b>SECTIONS</b>	Manual, with plates and holes		

**EDX 750****MODEL WITH DISC DISTANCE 200 mm**

<b>MODEL</b>	<b>DISC N.</b>	<b>WORK.W.</b>	<b>TRASP.W.</b>	<b>SUPP. N.</b>	<b>HP</b>	<b>KG</b>	<b>DISC.DIST.</b>	<b>Ø DISC</b>
<b>EDX750 21 01</b>	21	2,20	2,30	8	60	760	200	560/4,5
<b>EDX750 25 01</b>	25	2,60	2,50	8	70	830	200	560/4,5
<b>EDX750 29 01</b>	29	3,00	2,50	8	70	890	200	560/4,5

**MODEL WITH DISC DISTANCE 230 mm**

<b>MODEL</b>	<b>DISC N.</b>	<b>WORK.W.</b>	<b>TRASP.W.</b>	<b>SUPP. N.</b>	<b>HP</b>	<b>KG</b>	<b>DISC.DIST.</b>	<b>Ø DISC</b>
<b>EDX750 21 11</b>	21	2,40	2,50	8	60	765	230	560/4,5
<b>EDX750 21 12</b>	21	2,40	2,50	8	70	840	230	610/5
<b>EDX750 25 11</b>	25	2,85	2,50	8	80	845	230	560/4,5
<b>EDX750 25 12</b>	25	2,85	2,50	8	90	920	230	610/5
<b>EDX750 29 11</b>	29	3,30	2,50	8	100	915	230	560/4,5
<b>EDX750 29 12</b>	29	3,30	2,50	8	110	1130	230	610/5

**EDX 780****MODEL WITH DISC DISTANCE 230 mm**

<b>MODEL</b>	<b>DISC N.</b>	<b>WORK.W.</b>	<b>TRASP.W.</b>	<b>SUPP. N.</b>	<b>HP</b>	<b>KG</b>	<b>DISC.DIST.</b>	<b>Ø DISC</b>
<b>EDX780 21 12</b>	21	2,40	2,50	8	100	1190	230	610/5
<b>EDX780 21 13</b>	21	2,40	2,50	8	110	1310	230	660/6
<b>EDX780 25 12</b>	25	2,85	2,50	8	120	1320	230	610/5
<b>EDX780 25 13</b>	25	2,85	2,50	8	130	1480	230	660/6
<b>EDX780 29 12</b>	29	3,30	2,70	8	140	1475	230	610/5
<b>EDX780 29 13</b>	29	3,30	2,70	8	150	1650	230	660/6
<b>EDX780 33 12</b>	33	3,75	3,20	8	160	1630	230	610/5
<b>EDX780 33 13</b>	33	3,75	3,20	8	170	1810	230	660/6

**MODEL WITH DISC DISTANCE 270 mm**

<b>MODEL</b>	<b>DISC N.</b>	<b>WORK.W.</b>	<b>TRASP.W.</b>	<b>SUPP. N.</b>	<b>HP</b>	<b>KG</b>	<b>DISC.DIST.</b>	<b>Ø DISC</b>
<b>EDX780 17 22</b>	17	2,25	2,50	8	100	1190	270	610/5
<b>EDX780 17 23</b>	17	2,25	2,50	8	110	1290	270	660/6
<b>EDX780 21 22</b>	21	2,80	2,50	8	120	1245	270	610/5
<b>EDX780 21 23</b>	21	2,80	2,50	8	130	1370	270	660/6
<b>EDX780 25 22</b>	25	3,35	2,70	8	140	1350	270	610/5
<b>EDX780 25 23</b>	25	3,35	2,70	8	150	1500	270	660/6
<b>EDX780 29 22</b>	29	3,90	3,20	8	160	1530	270	610/5
<b>EDX780 29 23</b>	29	3,90	3,20	8	170	1700	270	660/6

**ACCESSORIES**

<b>ACEDX70001</b>	Automatic linkage
<b>ACEDX70002</b>	Couple disc and distance piece
<b>ACEDX70003</b>	Turning tractor arm linkage

The machines have on series toothed discs on the front and smooth discs on the back.  
Different configurations have to be specified at the order.

**ma/ag**  
MACCHINE AGRICOLE

26011 Casalbuttano (Cremona) - ITALY

www.ma-ag.com - info@ma-ag.com

Via Giovanni Paolo II, 12

Tel. +39 0374 362680

Fax +39 0374 362280

